


Features

- External exposure control
- 1, 3 and 4 shutter driver channels
- Shutter interconnect cable included
- RS-232C input - 8 unique addresses
- Black aluminum enclosure.




VMM-T1

Type	Number of channels	Internal Timing	RS-232 Control	Power Input	Dimension (H x W x D)	Weight
Single channel CE/UL/CSA approved shutter driver						
VCM-D1	1	No	Yes	115/230 VAC three prong plug.	2.73" x 5.41" x 8.18" (69.3 x 137.4 x 207.8 mm)	4.0lbs. (1.81kg)
Single channel shutter driver						
VMM-D1	1	No	Yes	115/230 VAC three prong plug.	2.6" x 5.5" x 8.00" (66 x 139 x 203 mm)	4.0lbs. (1.81kg)
Three channel shutter driver						
VMM-D3	3	No	Yes	115/230VAC - 3 prong IEC type connector	2.60" x 5.50" x 8.00" (66 x 139 x 203 mm)	4.5lbs (2.05kg)
Four channel shutter driver						
VMM-D4	4	No	No	115/230VAC - 3 prong IEC type connector. Manual switching as required	2.60" x 5.50" x 8.00" (66 x 139 x 203 mm)	4.5lbs (2.05kg)
Single channel shuttr driver/timer						
VMM-T1	1	Yes	Yes	115/230 VAC 3 prong plug.	2.60" x 5.50" x 8.00" (66 x 139 x 203 mm)	4.0lbs. (1.81kg)

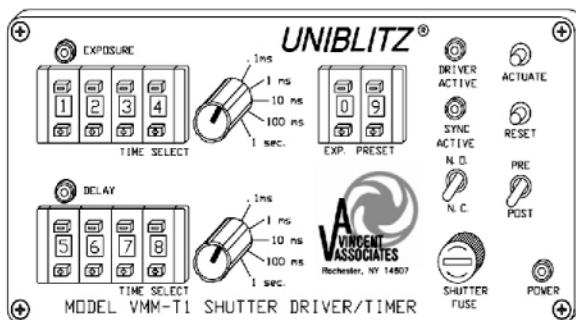

VMM-T1 Front Panel

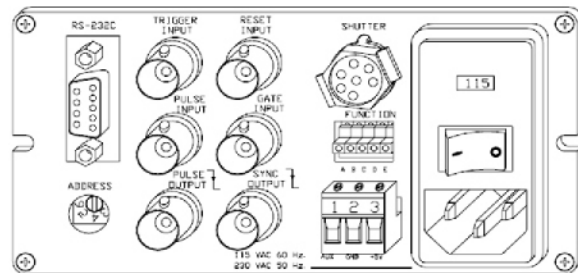

VMM-T1 Rear Panel